




DRI SINGLE PHASE 500 VA TO 50KVA Made in Vietnam

APPLICATIONS

- Factory & Office equipment
- 1 Phase Load Device
- Air Conditioning & Motor
- Household Equipment

Output Capacity (kVA)

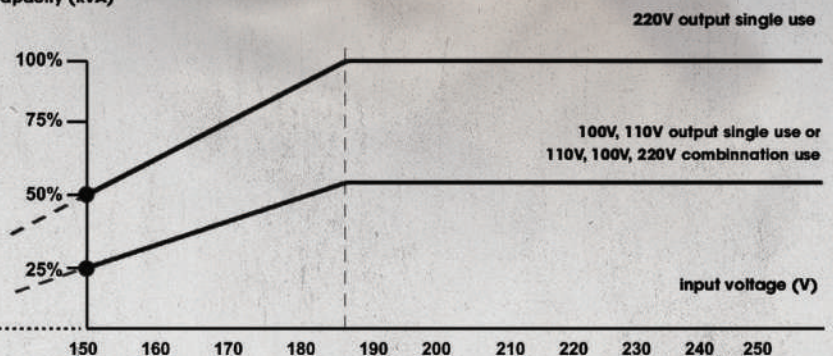

ADVANTAGES FEATURES

- Longer Warranty Period
- Copper to Copper connections
- Properly Ventilated & Insulated
- UL Certified Magnet Wire Cores
- Resettable circuit breaker for overload protection
- Full function, graphic LED display indicator for easy status reading
- High efficiency, low loss, low rising temperature, and long lifespan
- Safe and economic usage
- Fast Regulation
- Spare part support

TECHNICAL SPECIFICATION

TYPE	SH	DRI	DRII
REGULATOR INPUT			
INPUT RANGE:	150V (130V) - 250V	90V - 250V	50V - 250V
OPERATION FREQUENCY:	49Hz - 62Hz		
REGULATOR OUTPUT			
OUTPUT VOLTAGE:	220V - 110V (100V) ± 2 - 3%		
PROTECTION:	Short circuit - Over loading - Over voltage - Under voltage		
WORKING PRINCIPLE			
DC SERVO MOTOR WITH PCB, FULL AUTOMATIC.			
GENERAL			
COOLING:	SMART FAN SYSTEM		
MEASURE VALUE MONITOR:	DIGITAL VOLTMETER AND AMPMETER		
TOTAL EFFICIENCY:	98%		
PROTECTION LEVER:	IP 20 / IP25		
INSULATION RESISTANCE:	> 3MΩ		
DIELECTRIC STRENGTH:	TESTED AT 2000VAC / 1MIN		
RESPONSE TIME AGAINST 10% INPUT VOLTAGE DEVIATION:	0.4s - 1s (500VA - 10,000VA)	1s - 3s (15,000VA - 50,000VA)	
ENVIRONMENTAL			
WORKING TEMPERATURE:	-5°C - 50°C		
STORAGE TEMPERATURE:	-10°C - 60°C		
RELATIVE HUMIDITY:	<90% DIN (40040)		
WORKING ALTITUDE:	< 2000M		
DOCUMENT:	IEC / TCVN (ISO 9001)		